

## Low Standby Power Non-isolated CV Converter


### Description

The BP2525X is an ultra-low standby power non-isolated buck converter for constant output voltage application. The device is suitable for 85Vac~265Vac universal input non-isolated auxiliary power supply.

The BP2525X integrates a high voltage power MOSFET. With the output voltage and current control technique, it can get excellent CV regulation. The chip integrates smart high voltage startup and power supply circuit.

The BP2525X needs to utilize PWM & PFM multiple control, and powering VCC by output voltage, which contribute to very low standby power, high efficiency, excellent dynamic response and minimized audible noise.

The BP2525X is available in SOT33-5A package.

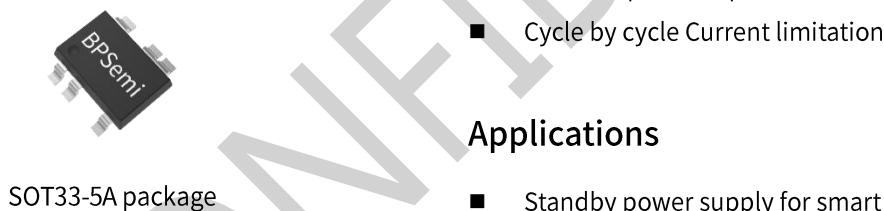

### Typical Application

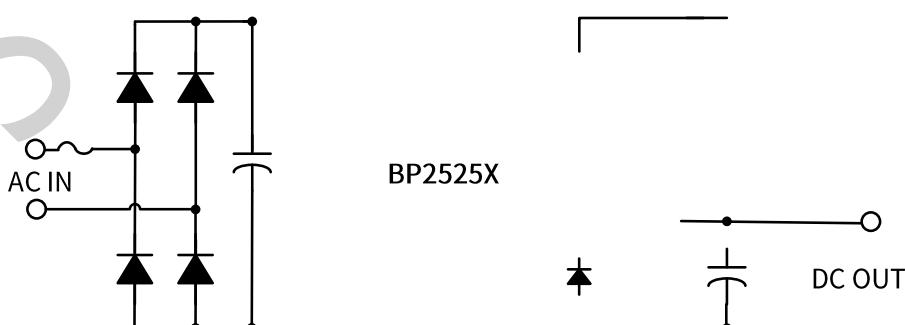


Figure 1. Typical application circuit for BP2525X

### Features

- Standby power <20mW at 120Vac and 230Vac
- Fixed 3.3V and 5V output voltage
- Support direct 3.3V output without LDO
- Reduced audible noise
- Internal High Voltage Power MOSFET
- Integrated HV startup
- Excellent dynamic response for smaller output voltage ripple
- $\pm 5\%$  output CV accuracy
- Integrated soft startup function
- SOT33-5A package

### Protection Function

- Overload protection
- Output short protection
- Over temperature protection
- Cycle by cycle Current limitation

### Applications

- Standby power supply for smart lighting
- Other auxiliary power applications

### Ordering Information

| Part Number | Package  | Operating Temperature | Package Method        | Marking                     |
|-------------|----------|-----------------------|-----------------------|-----------------------------|
| BP2525X     | SOT33-5A | -40 °C to 105 °C      | Tape<br>7,500pcs/reel | BP2525<br>XXXXXY<br>ZZZZWWX |

### Pin Configuration and Marking Information

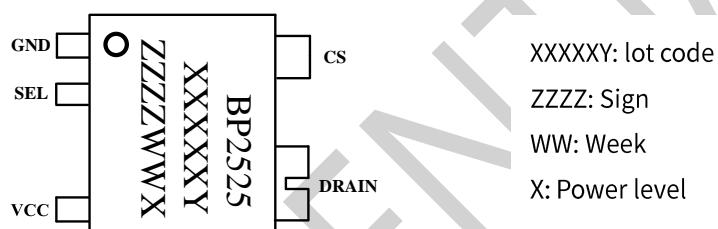


Figure 2. Pin configuration

### Pin Definition

| Pin No. | Name  | Description  |
|---------|-------|--|
| 1       | GND   | Ground   |
| 2       | SEL   | Output voltage selection pin. To VCC: Vout= 3.3V; To GND Vout= 5V      |
| 3       | VCC   | Power supply pin   |
| 4       | DRAIN | Drain of the integrated HV MOSFET                                      |
| 5       | CS    | Current Sense Pin. Connect a resistor to GND to sense the MOS current. |

## Disclaimer

The information provided in this datasheet is believed to be accurate and reliable. However, Bright Power Semiconductor (BPS) reserves the right to make changes at any time without prior notice.

No license, to any intellectual property right owned by BPS or any other third party, is granted under this document. BPS provides information in this datasheet “AS IS” and with all faults, and makes no warranty, express or implied, including but not limited to, the accuracy of the information provided in this datasheet, merchantability, fitness of a specific purpose, or non-infringement of intellectual property rights of BPS or any other third party. BPS disclaims any and all liabilities arising out of this datasheet or use of this datasheet, including without limitation consequential or incidental damages.

CONFIDENTIAL